



Model	Flow lt/min	%	$\Delta p$
125	350 lpm	0,7-1,7%	120-140 kPa
150	600 lpm	0,7-1,7%	120-140 kPa
200	1000 lpm	0,7-1,7%	120-140 kPa
250	2000 lpm	0,7-1,7%	120-140 kPa
300	3000 lpm	0,7-1,7%	120-140 kPa

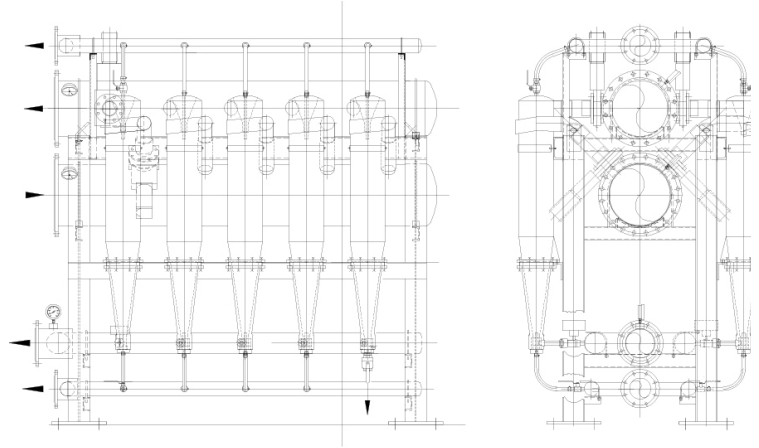

**AVAILABLE MODELS**


**STANDARD**

Continuous discharge

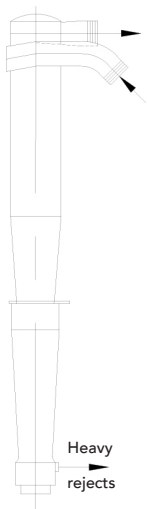


**RFC**

Continuous discharge with washing and inspection

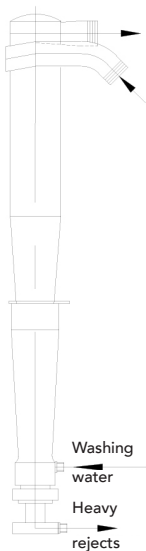


**RFD**

Discontinuous discharge

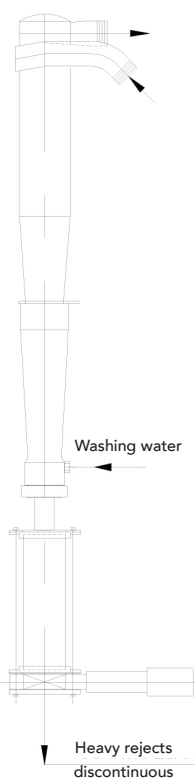


**ESL**

Continuous discharge with light rejects

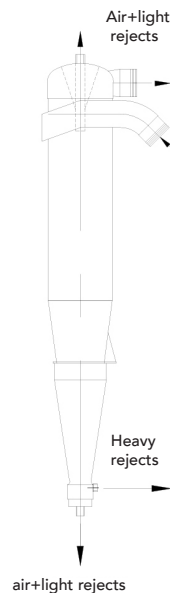

**RFC/ESL**

Continuous discharge with light rejects with washing and inspection

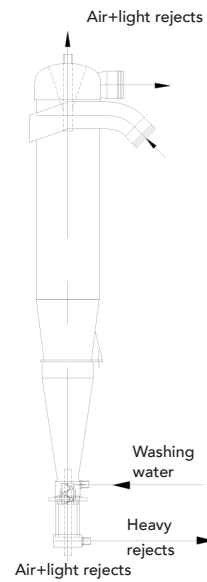

**RFD/ESL**

Continuous discharge with light rejects

